


## HE-300 Additional Remote Control

V1.0

The HE-300 Remote Control is a expansion unit for the home Easy range of products and is designed to work with all the HomeEasy receiver sockets and modules..

Additional HomeEasy receiver products are required for the HE-300 to work.

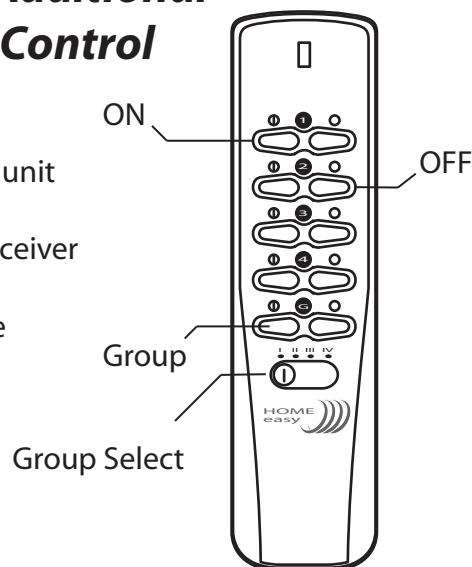

### Group Settings:


The HE-300 Remote Control transmitter can be paired with up to 16 separate receiver units, using the Group setting function.

Group 1 - Function 1, 2, 3, 4 (Default Setting)

Group 2 - Function 5, 6, 7, 8

Group 3 - Function 9, 10, 11, 12

Group 4 - Function 13, 14, 15, 16




The HE-300 Remote control also has a group button allowing you to switch "On/Off" an entire group, at the push of a button.

### Group Setting G:

The group setting allows you to switch "On/Off" multiple receiver sockets/modules in one simple press. To set a receiver to the group setting, set the receiver into the learn mode as normal (see instructions Learn Mode) and press group(G) On.

The socket will now switch On/Off with the group buttons; this stays the same even if the group slide switch is on I, II, III or IV.

The receiver sockets/modules can still be used individually using the normal On/Off buttons.



### Changing Battery:

Remove the battery holder form the bottom of the remote control. The HE-300 uses a single CR2032 battery:

Remove the battery from the holder and replace with new, making sure the polarity match's the internal markings.

### Product Specification:

Remote Control: HE-300

Battery: 3v Cr2032

Range: 30 Metres (Open Distance)

Frequency: 433.92MHz

Indoor Use Only

**Warning:** Never Exceed the Product Specification

### Product Compatability:

The HE-300 remote control is compatible with all HomeEasy products

### Contact:

C H Byron  
34, Sherwood Rd  
Aston Fields  
Bromsgrove  
B60 3DR

### Helpline: 0845 2301 231

Tel: 0845 2301231  
Fax: 01527 557701  
Web: [www.chbyron.com](http://www.chbyron.com)  
E-mail: [support@chbyron.com](mailto:support@chbyron.com)

<b>Byron</b>		433MHz	
R&TTE APPROVED			
<b>CE 0560</b>			
A	IRL	UK	M
B	L	BG	N
DK	NL	CZ	SK
FIN	P	EST	SLO
F	E	H	CH
D	S	IS	PL
GR		LV	RO
LT			

CH Byron Electrical United Kingdom. [www.chbyron.com](http://www.chbyron.com)